


Quality Management System ISO 9001:2000


Tolerances and standards for all Mentis gratings are the same as those laid down in the Metal Bar Grating Manual published by the National Association of Architectural Metal Manufacturers in the U.S.A. These are the same tolerances and standards adopted for use by most leading grating manufacturers worldwide.

- Bearer Bar lean .6°
- Length and width = +/- 6mm.
- Out of square = 10mm.
- Mass, bearer bar and transverse bar dimensions = 10% of catalogue dimensions and closer mass.
- Kickplate Dimensions = +/- 10% in width and closer thickness.
- Bearer Bar Thickness: As specified +/- 0.4mm (for bars up to 10mm)

HfUbgj YfgY 6Uf 5`[ba Ybhv GdUW]b[

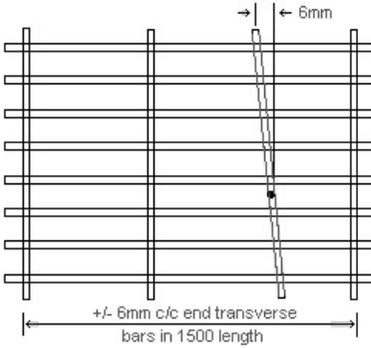

Gei UFybYgg Hc`YfUbWg/ 8]a Ybg]cbg

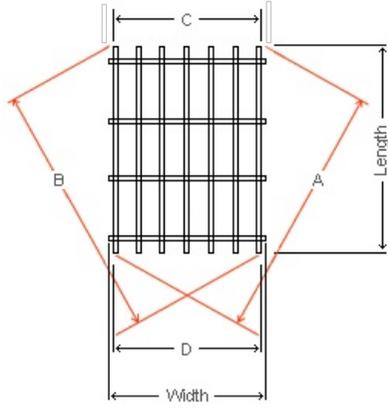


HfUbgj YfgY 6Uf Hc`YfUbWg! ; f]dk Y`X



Length +/- 6 mm	B = A +/- 10 mm
Width +/- 6 mm	C = D +/- 6 mm

HfUbgj YfgY 6ck

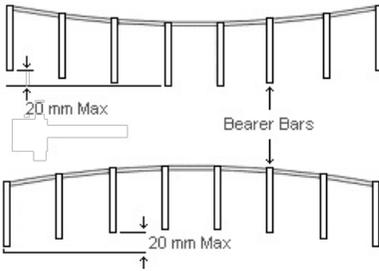

@cb[]h X]bU 6ck

